



TSP-008010G2-VD-6



外形尺寸

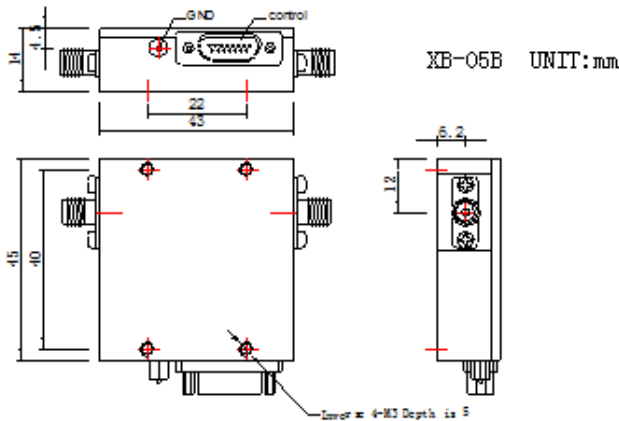

测试曲线 (Temp@25°C)

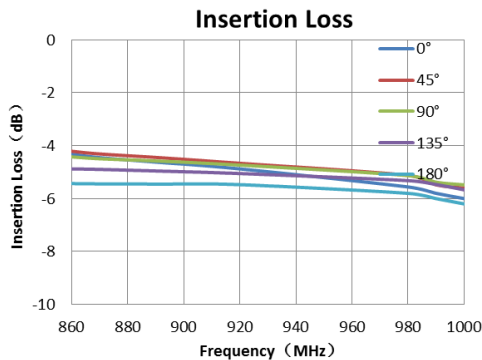

■ 频率范围	0.86~1.0GHz
■ 相位误差	+/- 3.0deg typ
■ 插入损耗	-5dB typ

技术指标@25°C

频率范围	0.86~1.0GHz
插入损耗	-5dB typ
入口回波损耗	-15dB typ
出口回波损耗	-15dB typ
均方值误差	+/- 6.0deg typ
P1dB	30dBm
并联位控制电压(UART 串口控 9600bps、N、8、1)	L/0-0.5V; H/2.4-5V
电流	20mA (max)
工作温度	-40~70°C
储存温度	-55~100°C
电源电压 (max)	15V
最大入口功率	27dBm

订单描述

TSP-008010G2-VD-6 指标特性

